101429 SH 1

SPECIFICATIONS

FREQUENCY BAND: 33.0 - 50.0 GHz
INSERTION LOSS: 0.5 dB MAX (0.3 dB TYP)
VSWR : 2.0:1 MAX
ISOLATION : .5 dB MIN AT 65 - 150 GHz
FINISH
FLANGE FACES: CHROMATE CONVERSION COATED.
EXTERIOR: BLACK PAINT, COLOR #37038 PER FED-STD-595.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	SEE REVISION SHT	04-19-99	

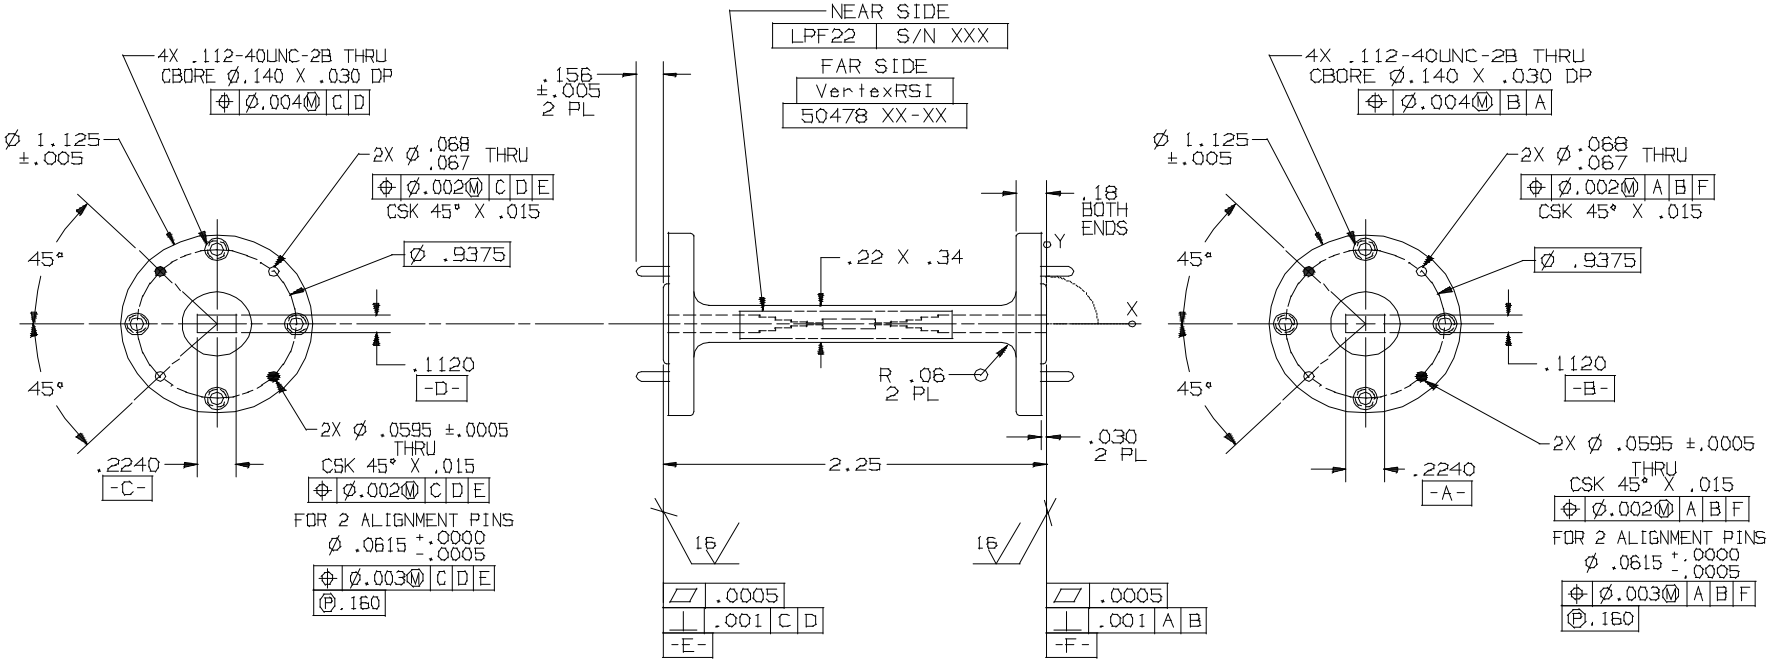

UNLESS OTHERWISE SPECIFIED	SIGNATURES	DATE
DIMENSIONS ARE IN INCHES	DRAWN: W.S.	06-18-81
TOLERANCES- .XX ±.01, .XXX ±.002, .XXXX ±.0010	CHECKED: L.J.W.	06-18-81
SURFACE 63	ENGRG:	
ANGLES± 0° 15'	MFG:	
MATERIAL		
FINISH		
M/N FL-Q-WG-1004		

VertexRSI™
A TriPoint Global Company
Torrance, CA Facility, TORRANCE@TRIPOINTGLOBAL.COM
3111 Fujita St., Torrance, CA 90505, (310)539-6704

Q-BAND LOW PASS FILTER, LPF22

SIZE	FSCM NO.	DRAWING NO.
D	50478	101429

SCALE: 4/1 SHEET 1 of 2