

107388 | SH 1 |

SPECIFICATIONS

FREQUENCY BAND: 43.50 - 45.50 GHz

INSERTION LOSS
TE₀₁ MODE: 0.10 dB MAX

ISOLATION
TO TE₁₁ MODE: 16 dB MIN


VSWR : 1.15:1 MAX

PRESSURIZATION: SEALED TO 5.0 PSIG


FINISH
FLANGE FACES: IRIDITE 17P, ALLIED KELITE.
EXTERIOR: BLACK PAINT, COLOR #37038
PER FED-STD-595.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
H	SEE REVISION SHT	05-10-99	

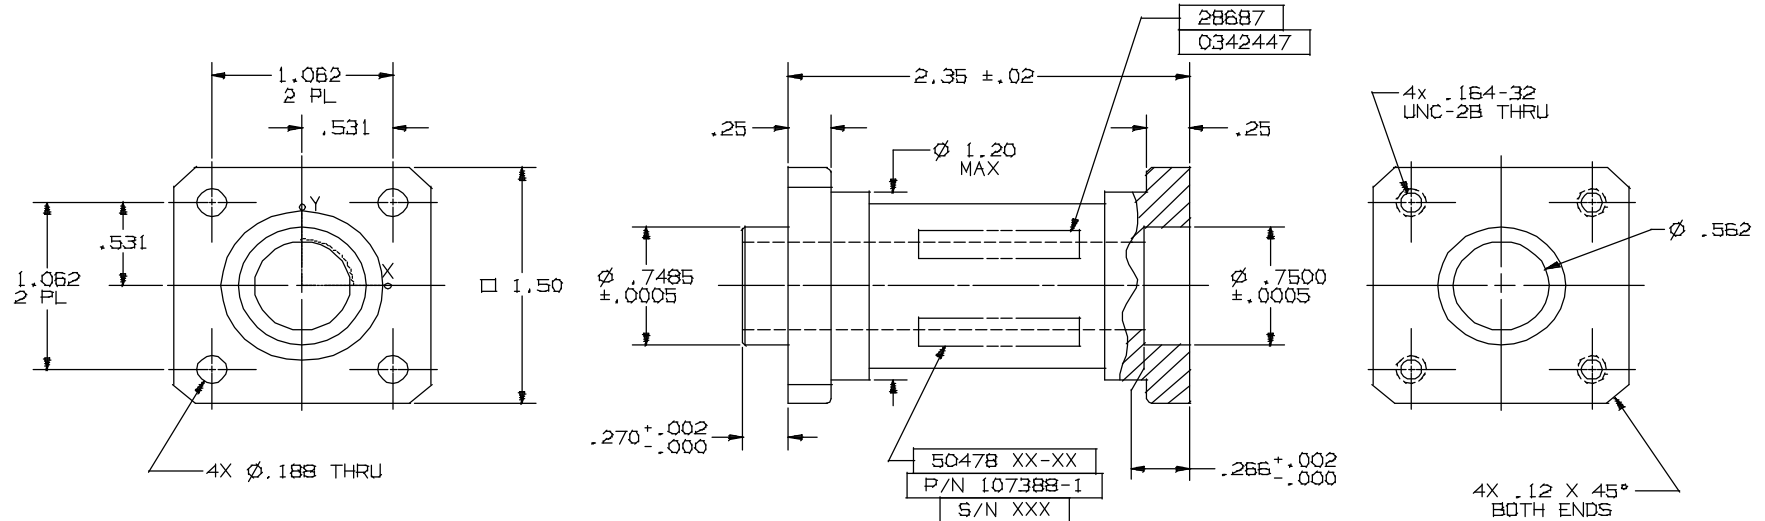

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED	SIGNATURES	DATE	 VeritexRSI™ A TriPoint Global Company Torrance, CA Facility, TORRANCE@TRIPPOINTGLOBAL.COM 3111 Fujita St., Torrance, CA 90505, (310)539-6704
DIMENSIONS ARE IN INCHES	DRAWN L. TOVALIN	04-07-99	
TOLERANCES-	CHECKED L. A. REDD	04-19-99	
SURFACE	ENGINEER H. ROTHENBERG	04-20-99	
6.3	DATE		
ANGLES±	FIG.		
MATERIAL			
FINISH			
M/N FL-Q-WG-1003			
	SIZE FSCM NO.	DRAWING NO.	Q-BAND FILTER TE ₀₁ MODE, Ø.562 107388
	C 50478		
	SCALE: 2:1		SHEET 1 OF 2