

107645 | SH 1 |


SPECIFICATIONS

FREQUENCY BAND: 43.50 - 45.50 GHz
 INSERTION LOSS: 0.50 dB MAX
 VSWR : 1.50:1 MAX
 ISOLATION : 50 dB MIN @ 38.5 GHz
 50 dB MIN @ 50.5 GHz
 PRESSURIZATION: SEALED TO 5 PSIG

FINISH
 FLANGE FACES: GOLD PLATED PER MIL-F-14072A,
 M310, TYPE I.
 EXTERIOR: BLACK ENAMEL PAINT. COLOR #37038
 PER FED-STD-595.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
C	SEE REVISION SHT	05-10-99	

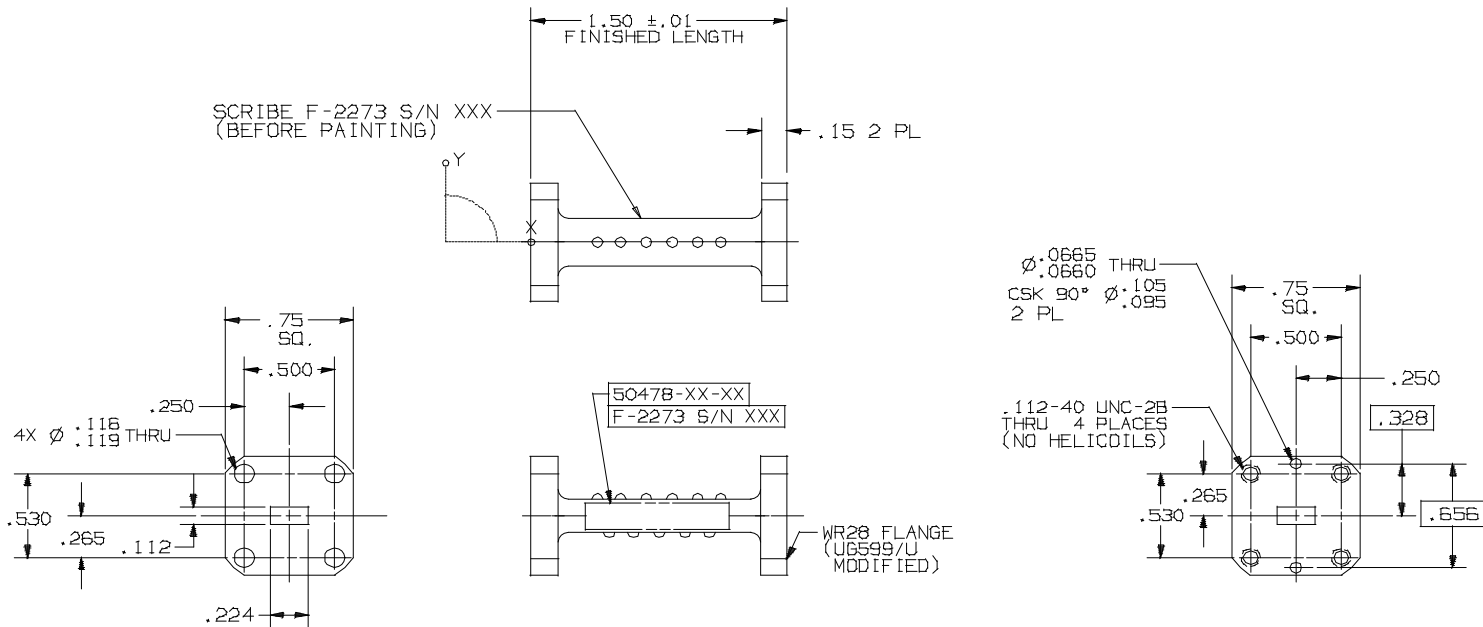

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED	SIGNATURES	DATE
DIMENSIONS ARE IN INCHES	DRAWN: TOVALIN, L.	04-03-89
TOLERANCES-	CHECKED: L. A. REDD	04-04-89
.XX ±.01	ENGRD: R. E. TERRY	03-04-89
.XXX ±.002	ENGRD: H. ROTHENBERG	04-04-89
.XXXX ±.	MFG:	
6.3		
✓ ANGLES±		
MATERIAL		
FINISH		

VerTexRSI™
 A TriPoint Global Company
 Torrance, CA Facility, TORRANCE@TRIPPOINTGLOBAL.COM
 3111 Fujita St., Torrance, CA 90505, (310)539-6704

Q-BAND FILTER
 BANDPASS, MODEL F-2273
 SIZE: FSCM NO. DRAWING NO.
 C 50478 107645
 SCALE: 2/1 SHEET 1 of 1