


111669 SH 1

ELECTRICAL SPECIFICATIONS

FREQUENCY BAND : 53.0 - 69.0 GHz
 INSERTION LOSS : 0.3 dB MAX
 VSWR : 1.5:1 MAX
 CROSS POLARIZATION: 25 dB MIN
 PRESSURIZATION : 5 PSI
 FINISH : COPPER
 APPROXIMATE WEIGHT: 70 g

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	SEE REVISION SHEET		

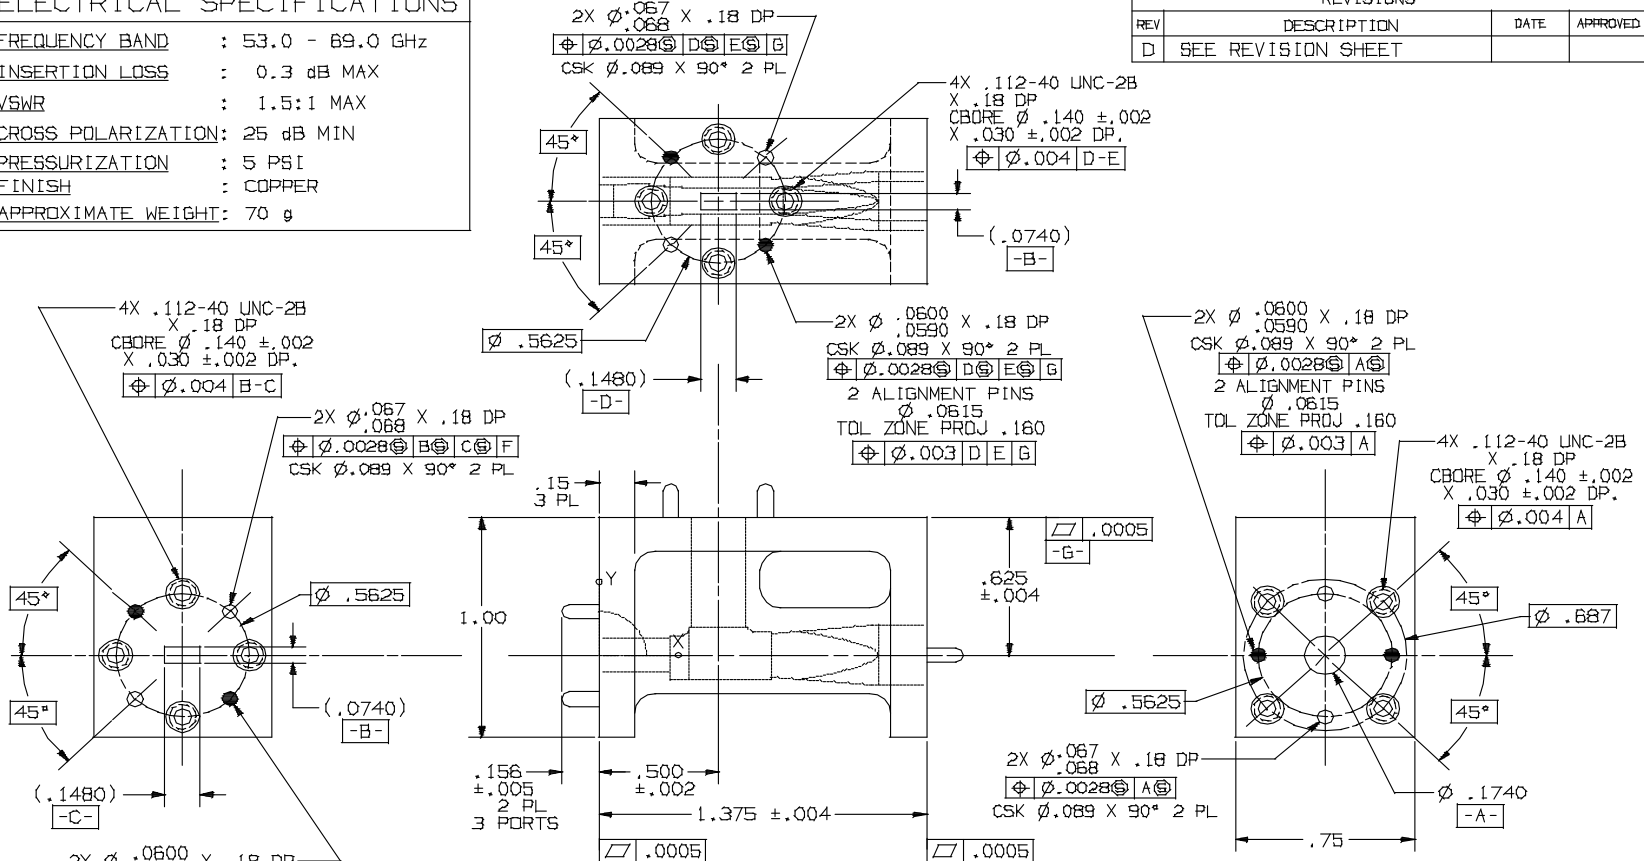

UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE	
DIMENSIONS ARE IN INCHES		DRW: L. TOVALIN		03-24-97	
TOLERANCES:		CHECKED: H. SPITELDER		04-01-97	
SURFACE		XXX $\pm .01$			
16		.XXX $\pm .001$			
✓		.XXX $\pm .0005$			
		ANGLES \pm 0°15'			
MATERIAL		WFS:			
FINISH					

VertexRSI™
 A TriPoint Global Company
 Torrance, CA Facility, TORRANCE@TRIPPOINTGLOBAL.COM
 3111 Fujita St., Torrance, CA 90505, (310)539-6704

V-BAND OMT.
 53 TO 69 GHz

SIZE	FSCM NO.	DRAWING NO.	REV
C	50478	111669	D
SCALE: 2/1		SHEET I	