



110161 | SH 1 |

SPECIFICATIONS



FREQUENCY BAND: 7.25 - 7.75 GHz
 INSERTION LOSS: 0.50 dB MAX
 VSWR : 1.20:1 MAX
 ISOLATION : 60 dB MIN AT 7.90-8.40 GHz
 PRESSURIZATION: SEALED TO 5 PSIG
 FINISH
 FLANGE FACES: CAD PLATED PER QQ-P-416,
 TYPE II, CLASS 2.
 EXTERIOR: WHITE PAINT, COLOR NO. 17875
 PER FED-STD-595.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
C	SEE REVISION SHT	05-06-99	

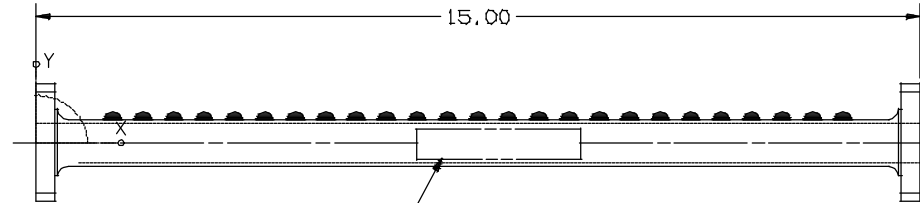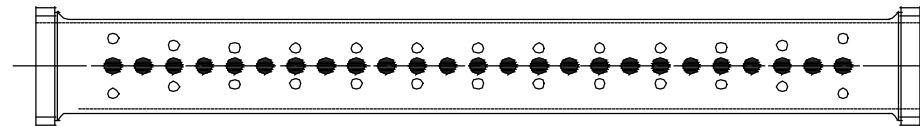

Vertex MPI
 50478 XX-XX
 P/N 110161-1
 S/N XXX

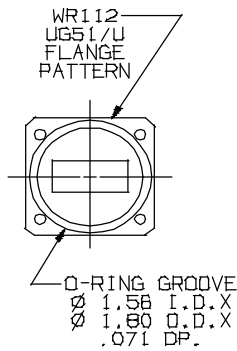

UNLESS OTHERWISE SPECIFIED		SIGNATURES	DATE
DIMENSIONS ARE IN INCHES		DRWG: L. TOVALIN	01-05-93
TOLERANCES-		CHECKED: H. SpTeleder	01-05-93
SURFACE .XX ±.01		ENGR:	
.XXX ±.004		DRWG:	
.XXXX ±.0020		WFB:	
✓ 63 ANGLES±			
MATERIAL			
FINISH			
M/N			
SIZE FSCM NO.		DRAWING NO.	
C 50478		110161	
SCALE: 1/1		SHEET 1 of 3	

VertexRSI™
 A TriPoint Global Company
 Torrance, CA Facility, TORRANCE@TRIPPOINTGLOBAL.COM
 3111 Fujita St., Torrance, CA 90505, (310)539-6704

**X-BAND FILTER,
 Tx REJECT, 60 dB**